

Hydraulic Spreaders

1 & 1½ Ton Capacity

It's a hydraulic pry bar!



- Use to lift machines or as a clamp; spread concrete forms or rebar or perform straightening jobs.
- Conforms to ASME B30.1 standard.
- High strength alloy steel forged upper and lower jaws on HS2000.
- Jaws are spring-return; retract automatically when pressure is released.
- **HS2000** 1 ton capacity spreader
Full 2,000 lbs. capacity at 10,000 psi. with 4" spread
Can be "dead-ended" at 4" spread under full load.
Needs only 9/16" clearance to engage jaws.
- **HS3000** 1½ ton capacity spreader
Full 3,000 lb. capacity at 10,000 psi. with 11½" spread
Greater than competitive units.
Needs only 1¼" clearance to engage jaws.
Can be "dead-ended" at 11½" spread at full load.





HS2000 SPECIFICATIONS

Maximum rated capacity1 ton @ 10,000 psi
 Maximum spread4"
 Minimum clearance required9/16"
 Cu. in. oil required63

HS3000 SPECIFICATIONS

Maximum rated capacity 1½ ton @ 10,000 psi
 Maximum spread 11½"
 Minimum clearance required.....1¼"
 Cu. in. oil required 3.50

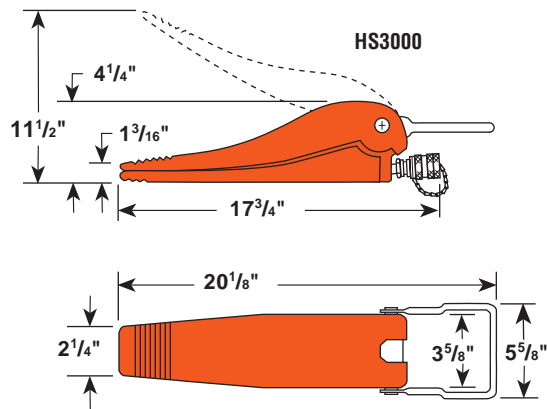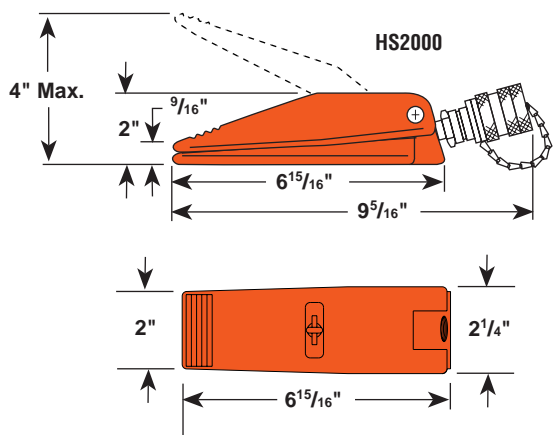

Spreader Grid

| Capacity (tons) | Max. Spread (in.) | Order Number | Oil Capacity (cu. in.) | Min. Clearance Required (in.) | Weight (lbs.) |
|-----------------|-------------------|--------------|------------------------|-------------------------------|---------------|
| 1 | 4 | HS2000 | .63 | 9/16 | 4.8 |
| 1½ | 11½ | HS3000 | 3.5 | 1¼ | 22 |