

▼ Shown: H-4049L, G-2534R, G-4089L, G-2535L, G-4040L



Visual References for System Pressure



Maximum Indicating Pointer

Indicator retains peak readings of pressure or force generated by the system.

Order model number: H-4000G.

Note: For use on H-Series gauges only.

Glycerine Filled (G-Series)

- Calibrated in dual scale reading in psi and bar
- All pressure sensing parts sealed and dampened by glycerine for long life
- Includes safety blow-out disk and pressure equaling membrane
- Gauge snubbers or needle valves recommended for high cycle applications

High Cycle (H-Series)

- Calibrated in dual scale reading in psi and bar
- Ideal for use in many applications, specifically for high cycle and harsh environments
- Gauge snubbers or needle valves recommended to shut off gauge when not in use



Gauge adaptor

For easy gauge installation into almost any system, Enerpac offers a complete line of gauge adaptors.


Page: 124



Snubber Valve


Infinitely adjustable for metering oil out of a gauge. The V-9 Snubber Valve is also suitable as a shut-off valve to protect the gauge during high cycle applications.

Page: 133

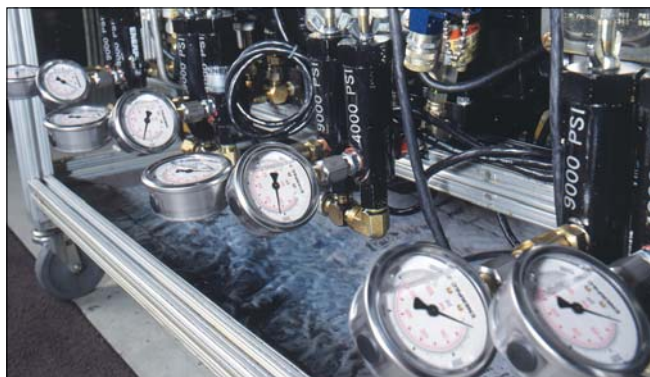

◀ Enerpac glycerine filled gauges, used to cycle test hydraulic pumps in a test lab environment.

Hydraulic Pressure Gauges

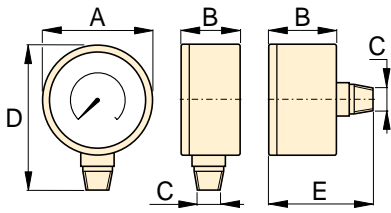

**G
H
Series**



Dimensions (in)						
Face ø	Connection	A	B	C	D	E
2.5	Lower Mount	2.50	1.46	1/4 NPTF	3.31	-
2.5	Center Rear	2.50	1.46	1/4 NPTF	-	2.48
4.0	Lower Mount	4.0	1.15	1/4 NPTF	4.80	-
4.0	Lower Mount	4.0	1.93	1/2 NPTF	5.38	-

Note: dimensions for reference only.

Pressure Range:

0-15,000 psi

Face Diameter:

2.5 - 4 inch

Accuracy, % of full scale:

±1% and 1½%

▼ SELECTION CHART

Gauge Series	Pressure Range		Model Number				Major Grad.	Minor Grad.		Major Grad.	Minor Grad.			
			Face ø 2.5" 1/4 NPTF Lower Mount	Face ø 2.5" 1/4 NPTF Center Rear	Face ø 4" 1/4 NPTF Lower Mount	Face ø 4" 1/2 NPTF Lower Mount								
			Accuracy ±1½%	Accuracy ±1½%	Accuracy ±1%	Accuracy ±1%								
						psi				bar				
(psi) (bar)						(2.5")	(4")	(2.5")	(4")	(2.5")	(4")	(2.5")	(4")	
G-Series	0-100	0-7	G2509L	-	-	-	10	-	2	-	1	-	.01	-
	0-160	0-11	G2510L	-	-	-	10	-	2	-	1	-	.02	-
	0-200	0-14	G2511L	-	-	-	50	-	5	-	1	-	.02	-
	0-300	0-20	G2512L	-	-	-	50	-	5	-	5	-	.50	-
	0-600	0-40	G2513L	-	-	-	100	-	10	-	10	-	1	-
	0-1,000	0-70	G2514L	G2531R	-	-	100	-	20	-	10	-	1	-
	0-2,000	0-140	G2515L	-	-	-	500	-	50	-	10	-	2	-
	0-3,000	0-200	G2516L	-	-	-	500	-	50	-	50	-	5	-
	0-6,000	0-400	G2517L	G2534R	-	-	1000	-	100	-	100	-	10	-
	0-10,000	0-700	G2535L	G2537R	G4088L	G4039L	2000	1000	200	100	100	100	10	10
0-15,000	0-1000	G2536L	G2538R	G4089L	G4040L	3000	3000	200	200	100	100	20	20	
H-Series	0-10,000	0-700	-	-	H4049L	H4071L	-	1000	-	100	-	100	-	10