

Hydraulic Wedgie and Spread Cylinders

▼ Shown clockwise from top: WR-15, WR-5, A-92



A, WR Series

Capacity:
0.75-1 ton


Tip Clearance:
0.38-1.38 inch

Maximum Spread Range:
3.70-11.50 inch


Maximum Operating Pressure:
10,000 psi

- Single-acting, spring return
- WR-15: For long stroke spreading applications
- WR-5: For use in very confined work areas
- A-92: Spreader attachment screws onto RC-Series 10 ton cylinders (except RC-101)


▼ A WR-5 wedgie cylinder is used to position a concrete block on a construction site.

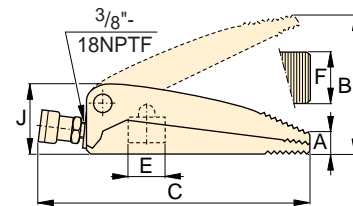

WR-5

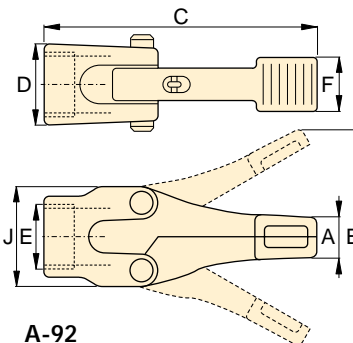

A-92

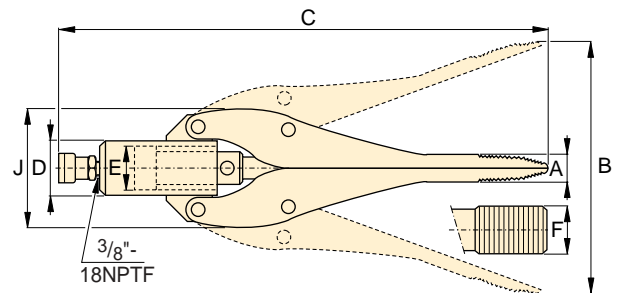

WR-15

Spreader Capacity (tons)	Tip Clearance (in)	Model Number	Cylinder Effective Area (in ²)	Oil Capacity (in ³)	Dimensions (in)							Weight (lbs)
					A	B	C	D	E	F	J	
1.00	.38	WR-5	1.00	.61	.38	3.70	8.78	—	1.13	2.01	2.01	5.0
.75	1.26	WR-15	2.25	3.91	1.26	11.50	21.65	2.24	1.69	2.01	6.18	25.0
1.00	1.38	A-92	—	—	1.38	6.25	9.63	2.75	2 1/4"-14 UNS	2.00	3.62	8.0