

▼ Gauge shown: T-6003L



T Series

Pressure Range:
0-50,000 psi

Face Diameter:
6.4 inch

Accuracy, % of full scale:
±1/2% and ±1 1/2%



Cone Mount Gauge Adaptor

Contains fittings to connect .25" cone fitting gauge to .38" cone system.

Kit includes 43-301 tee and 43-704 gauge adaptor.
Order model number: 83-011.

Page: 65



Cone Mount Gauge Connector


For connecting gauges with .25" cone fitting directly to model number 11-100 or

11-400 pump. May be used with other .25" cone systems
Order model number: 43-704

Page: 65

- Calibrated for dual scale reading in psi and bar
- All gauges have spring-loaded backs with rubber blow-out plugs to protect case assembly in case of over-pressurization
- 40,000 and 50,000 psi models include flange mounting
- 1/2" NPT versions are made of high strength alloy steel
- .25" cone models are made of 316 stainless steel, with 403 stainless steel on 40,000 and 50,000 psi models
- Integral maximum indicator pointer standard on all gauges

▼ An Enerpac P-2282 hand pump equipped with a T-6011L test system gauge is used for proof pressure testing of hydraulic valves.

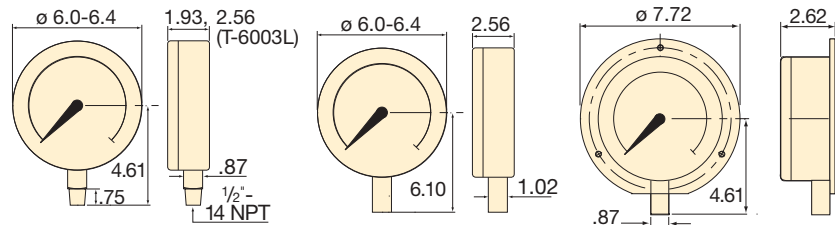

T-6001L, -6002L, 6003L

T-6007L, -6008L

T-6010L, -6011L

| Pressure Range (psi) | Pressure Range (bar) | Model Number | | Number Intervals (psi) | Graduation Intervals (psi) | Number Intervals (bar) | Graduation Intervals (bar) |
|-------------------------|-------------------------|--------------------------|------------------------------|---------------------------|-------------------------------|---------------------------|-------------------------------|
| | | Alloy Steel 1/2" NPTF | Stainless Steel .25" Cone | | | | |
| 0-1,000* | 0-70 | T-6001L | - | 100 | 10 | 10 | 1 |
| 0-5,000* | 0-350 | T-6002L | - | 500 | 50 | 50 | 5 |
| 0-10,000* | 0-700 | T-6003L | T-6007L | 1,000 | 100 | 100 | 10 |
| 0-20,000* | 0-1400 | - | T-6008L | 1,000 | 100 | 200 | 20 |
| 0-40,000** | 0-2800 | - | T-6010L | 5,000 | 200 | 500 | 20 |
| 0-50,000** | 0-3500 | - | T-6011L | 5,000 | 500 | 500 | 50 |

* Accuracy: ±1/2%

** Accuracy: ±1 1/2%