


# Sidewinder Jacks MINI JACKS

5-20 Ton

Compact Sidewinder Mini Jack fits in your palm and delivers 5, 10 & 20 tons of lifting force.



ASME B30.1

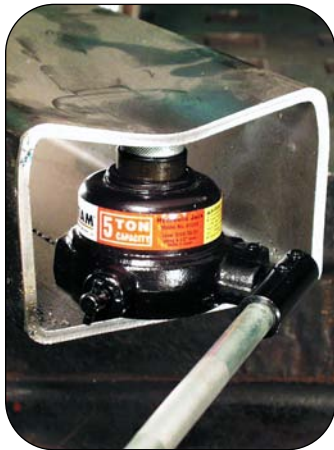

- Retracted height of just  $2\frac{9}{16}$ " for the smallest jack and  $5\frac{1}{8}$ " for the 20 ton, allows you to slip this jack into the narrowest of crevices.
- Jacks operate either horizontally or vertically. Handles function in line with base for easier use in confined spaces.
- The perfect addition to any toolbox, this remarkable little jack has multiple uses that are limited only by your imagination. Use it as a jack or a spreader. Use it to turn your mechanical gear puller (puller capacity must match jack puller capacity) into a hydraulic puller. Use it vertically or horizontally in limited clearance.

## ORDERING INFORMATION\*

Cap. Tons	Stroke (in.)	Order Number	Retracted Height (in.)	Min. (in.)	Max Height (in.)	No. Pump Strokes to Ext. Piston (in.)	Saddle Dia. (in.)	Base Size (in.)	Pump Handle Length (in.)	Handle Effort at Rated Cap. (lbs.)	Carry Handle	Product Weight (lbs.)
5	$\frac{3}{4}$	<b>9105A</b>	$2\frac{1}{2}$	$2\frac{1}{2}$	$3\frac{3}{8}$	30	$1\frac{9}{64}$	$2\frac{29}{32}$ Dia.	$9\frac{7}{16}$	57	No	4.2
5	$1\frac{1}{2}$	<b>9205A</b>	$3\frac{1}{2}$	$3\frac{1}{2}$	$5\frac{1}{8}$	38	$1\frac{9}{64}$	$2\frac{29}{32}$ Dia.	$9\frac{7}{16}$	57	No	5.3
10	$1\frac{3}{16}$	<b>9210A</b>	$4\frac{3}{4}$	$4\frac{3}{4}$	$5\frac{7}{8}$	36	$1\frac{21}{32}$	$4\frac{21}{64}$ Dia.	$17\frac{21}{64}$	62	No	12.1
20	$1\frac{3}{16}$	<b>9220A</b>	$5\frac{1}{8}$	$5\frac{1}{8}$	$6\frac{9}{16}$	46	$2\frac{9}{64}$	$4\frac{23}{32}$ Dia.	$23\frac{13}{16}$	77	No	17.6

\*See current price list for shipping weights.

JACKS